


**G12 – Road Access Possibilities**

# STELLENBOSCH MEMORIAL PARK

## PROPOSED ESTABLISHMENT OF A MEMORIAL PARK (CEMETERIES), STELLENBOSCH MUNICIPALITY

### ROAD ACCESS POSSIBILITIES

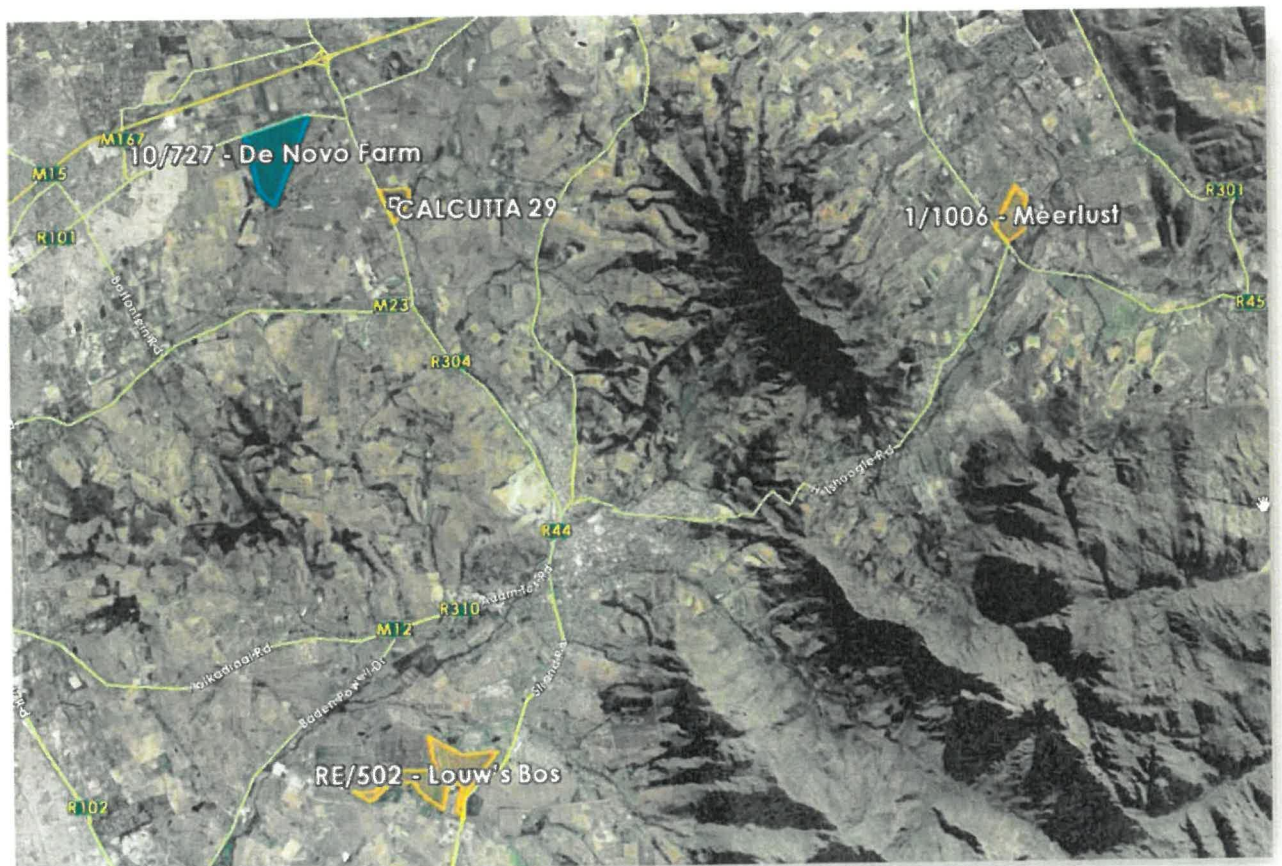

## DE NOVO

On Portion 10 of the Farm De Novo No. 727



- Posted Speed Limit on MR189: 100km/h
- Access off MR189 (R101)
- Shoulder Sight Distance required: 200m (Passenger Vehicle, 7.5m road width)
- Stopping Sight Distance: 155m (UTG1)
- AADT:  $\pm 2\ 500$  vpd (31 March 2015)
- Will require right turn lane
- WCG Design Dwg: WCS/11/2/D3
- Access will need to comply with access spacing (AMG)

## LOUW'S BOS

Remainder of the Farm Louw's Bos No. 502




- Posted Speed Limit on DR1050: 100km/h
- Access only from DR1050 (Annandale Rd), No access off MR27 (R44)
- Shoulder Sight Distance required: 200m (Passenger Vehicle, 7.5m road width)
- Stopping Sight Distance: 155m (UTG1)
- AADT:  $\pm 6\ 500$  vpd (2 September 2015)
- Will require right turn lane
- WCG Design Dwg: WCS/11/2/D3
- Access will need to comply with access spacing (AMG)

# CALCUTTA

Remainder of the Farm Calcutta No. 29



- Posted Speed Limit on MR174: 100km/h
- Access only from MR174 (R304) at  $\pm$ km50.58 according to AMP
- Shoulder Sight Distance required: 220m (Passenger Vehicle, 15m road width)
- Stopping Sight Distance: 155m (UTG1)
- AADT:  $\pm$ 12 900 vpd (15 January 2016)
- Will require right turn lane
- WCG Design Dwg: WCS/11/2/D3
- Access will need to comply with access spacing (MR174 AMP)


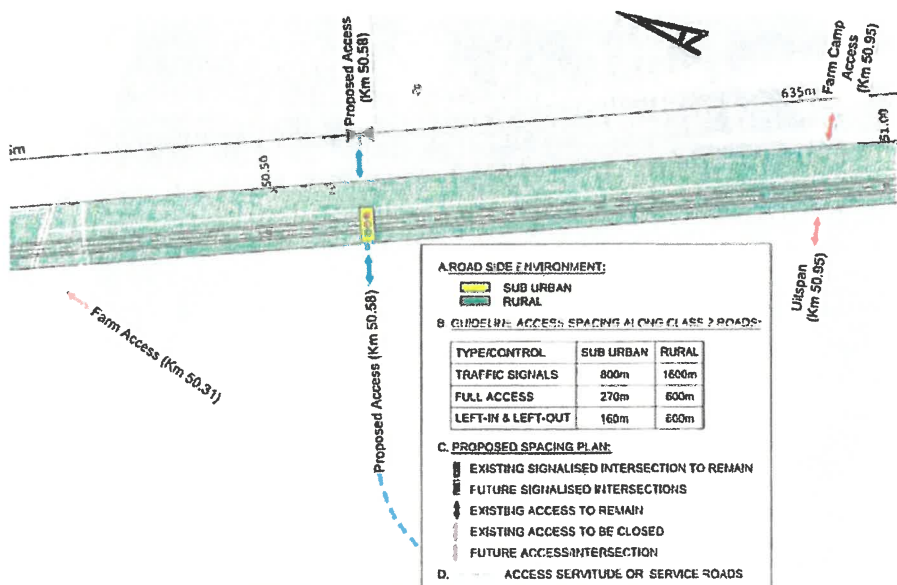


# MEERLUST

Portion 1 of Farm No. 1006





- Posted Speed on MR191 and OP5232: 100km/h
- Access off OP5232 or MR191 (R45)
- Shoulder Sight Distance required on MR191: 220m (Passenger Vehicle, 15m road width)
- Shoulder Sight Distance required on OP5232: 200m (Passenger Vehicle, 7.5m road width)
- Stopping Sight Distance: 155m (UTG1)
- AADT on MR191: ±9 000 vpd (26 February 2016)
- Will require right turn lane on MR191 but not on OP5232
- WCG Design Dwg: WCS/11/2/D3
- Access will need to comply with access spacing (AMG)

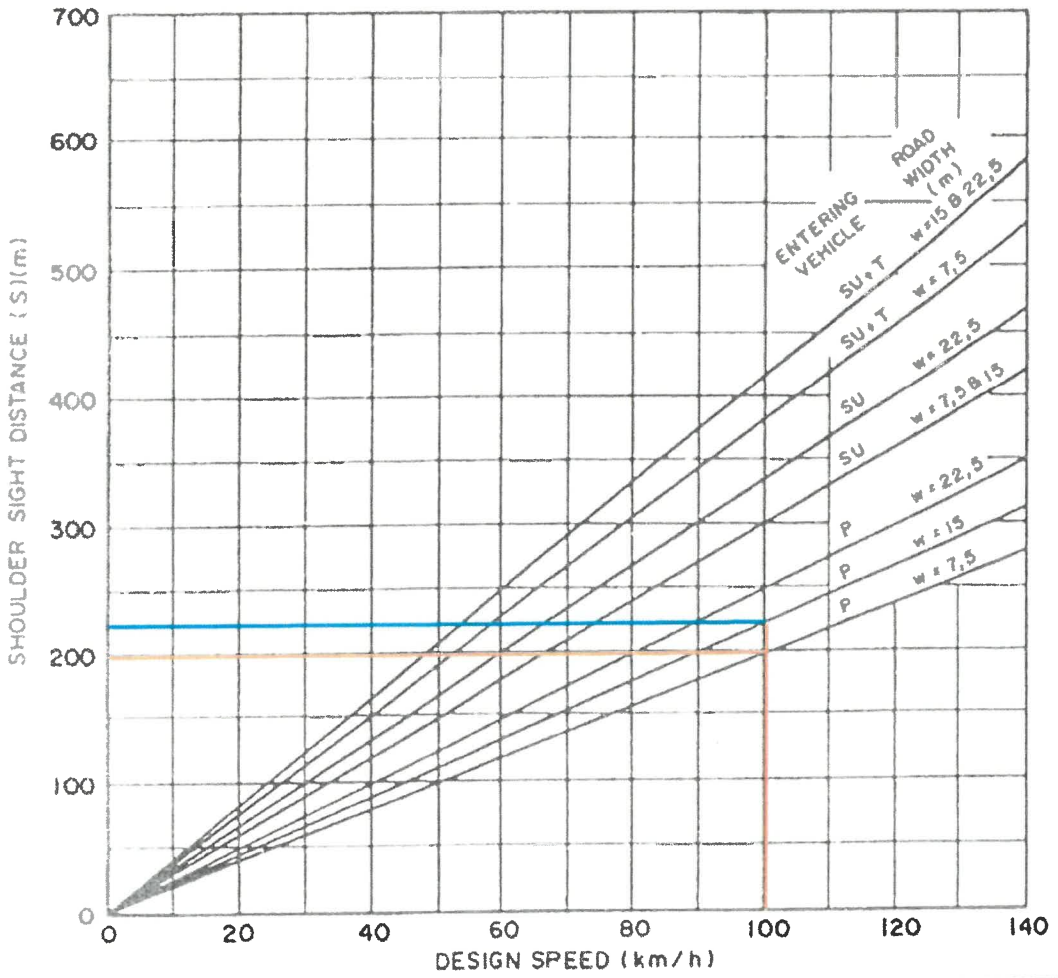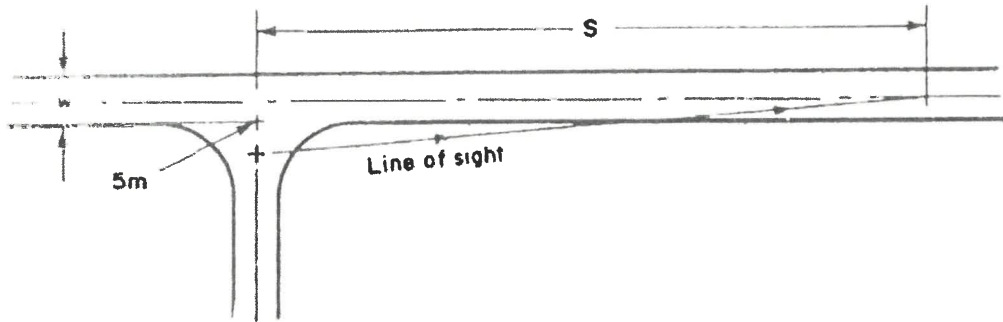

SHOULDER SIGHT DISTANCE FOR STOP CONDITION

# Calcutta Memorial Park, Proposed Access

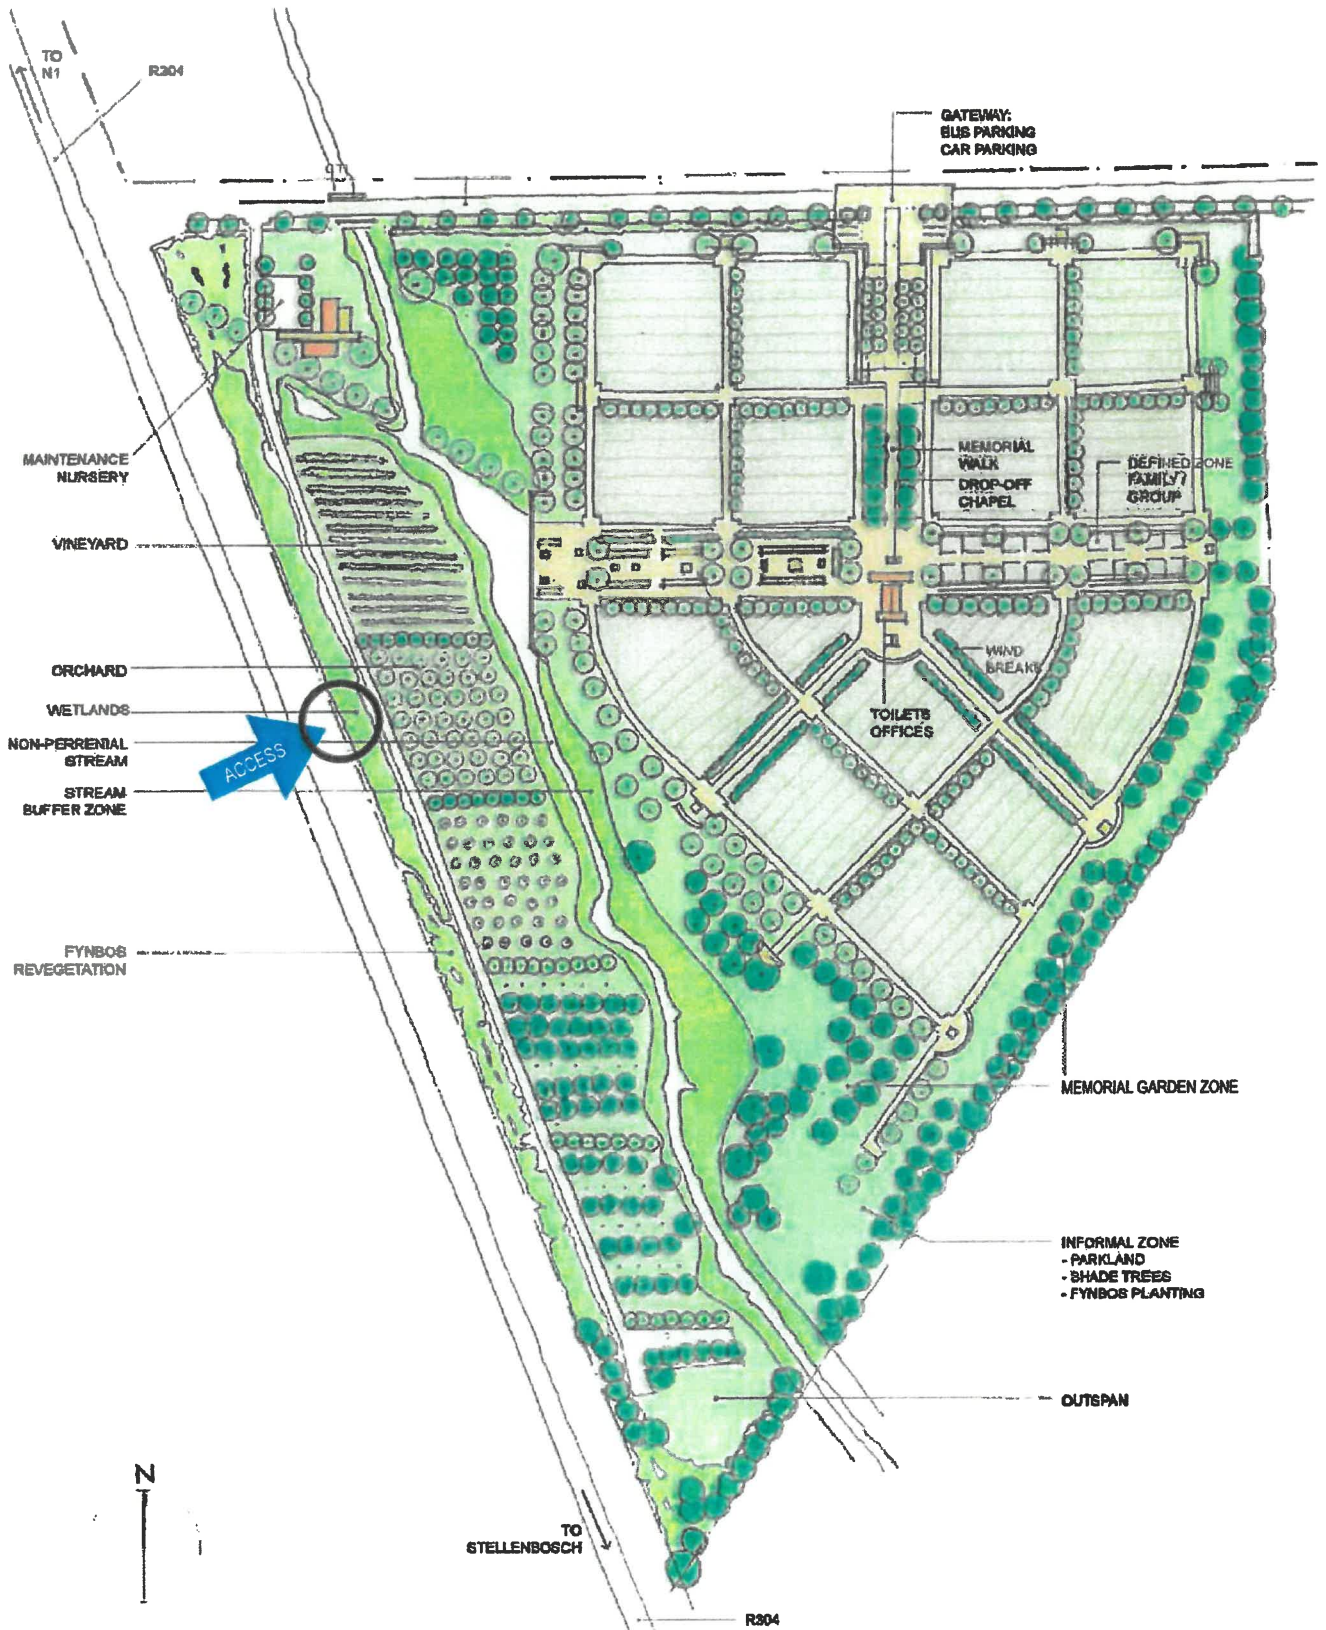

**CALCUTTA  
MEMORIAL PARK**  
DWG # 608-C2: 06-01-2019



OvP Associates . Landscape Architects 021 462 1262  
C.K Rumboll & Partners . Town Planners 022 482 1845